


HA2010

Increases safe working load,
easy operation



- Anti-entrapment system for operator safety
- 230kg unrestricted safe working load
- Self levelling for ease of setup

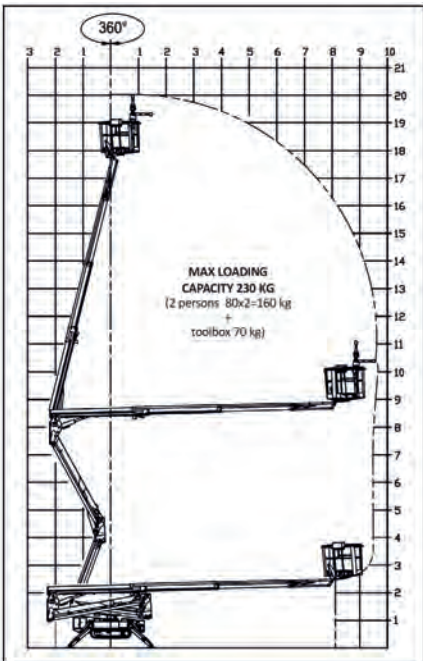

HA2010

Working height (max.)	20.15m
Platform height (max.)	18.15m
Lateral outreach (max.)	9.70m
Safe load on cage (max.)	230kg
Cage rotation	124°
Range of rotation	360°
Limited range of rotation - one side narrow	N/A
Limited range of rotation - both sides narrow	N/A
Cage dimensions (L x W x H)	1.3 x 0.7 x 1.1m
Removable cage	Y
Length in travelling position with cage (min.)	5.01m
Length in travelling position without cage (min.)	4.66m
Width in travelling position with cage (min.)	1.30m
Width in travelling position without cage (min.)	0.80m
Height in travelling position (min.)	2.00m
Net weight	2,940kg
Setup width standard	3.23m
Setup length standard	3.23m
Setup width - one side narrow	N/A
Setup width - both sides narrow	N/A
Power supply	Diesel 110v Mains 240v Mains
Climbing ability	16°
Setup ability	15°
Maximum point load (kN)	21.50
Load on 400mm pad (kN/cm ²)	134.38
Load on 600mm pad (kN/cm ²)	59.72
Load on 800mm pad (kN/cm ²)	33.59
Adjustable track height/width	Y
Drive control	Wired
Drive speed	2.50km/hr

DISCLAIMER

The information on this page is for guidance only and is subject to change without prior notice in line with the Manufacturer's Development Program. Higher Access and its suppliers cannot be held liable for any damage or injury sustained through use of this information to specify equipment.