


SA18

No noise, no fumes, simple operation.



- Lithium battery - no emissions and silent operation
- Self leveling for ease of setup
- Radio remote control for safe operation

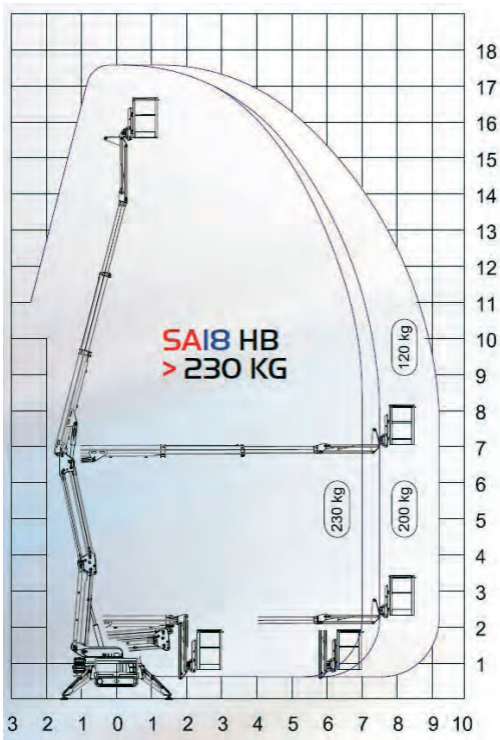

HigherAccess
Spider Lift Hire Specialists

08456 044 054 www.higheraccess.co.uk

SA18

Working height	17.80m
Platform height	15.80m
Lateral outreach	7.0m with 230kg
Safe load on cage	230kg max
Cage rotation	180°
Range of rotation	340°
Limited range of rotation - one side narrow	N/A
Limited range of rotation - both sides narrow	N/A
Cage dimensions	1.4x0.7x1.1m
Removable cage	Y
Length in travelling position with cage	4.41m
Length in travelling position without cage	3.71m
Width in travelling position with cage	1.42m
Width in travelling position without cage	0.78m
Height in travelling position	2.00m
Net weight	2,400kg
Setup width standard	3.15m
Setup length standard	3.15m
Setup width - one side narrow	-
Setup width - both sides narrow	-
Power supply	Lithium battery
Climbing ability	11°
Setup ability	11°
Maximum point load (N)	15,004
Load on 400mm pad (N/cm ²)	9.38
Load on 600mm pad (N/cm ²)	4.17
Load on 800mm pad (N/cm ²)	2.34
Live load in setup position (kN/m ²)	2.35
Traffic live load (kN/m ²)	7.27
Adjustable track height/width	No
Drive control	Radio remote
Drive speed	1.5km/h

DISCLAIMER

The information on this page is for guidance only and is subject to change without prior notice in line with the Manufacturer's Development Program. Higher Access and its suppliers cannot be held liable for any damage or injury sustained through use of this information to specify equipment.