


# HALEO31

Versatile, efficient, indoors or out.



- 250kg maximum safe working load
- Coming home and memory functions
- Auto levelling and radio remote

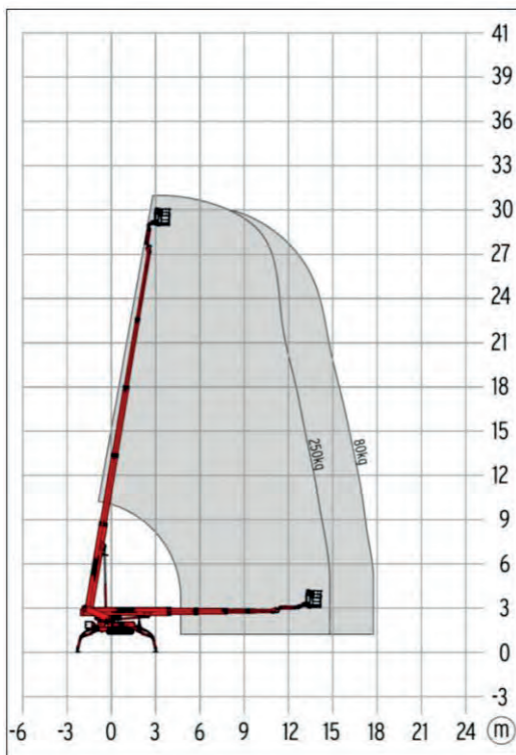

**HigherAccess**  
Spider Lift Hire Specialists

08456 044 054 [www.higheraccess.co.uk](http://www.higheraccess.co.uk)

# HALEO31

Working height	31.00m
Platform height	29.00m
Lateral outreach	17.7m with 80kg
Safe load on cage	250kg max.
Cage rotation	180°
Range of rotation	450°
Limited range of rotation - one side narrow envelope	Restricted
Limited range of rotation - both sides narrow envelope	Restricted
Cage dimensions	1.2 x 0.8 x 1.1m
Removable cage	Y
Length in travelling position with cage	7.23m
Length in travelling position without cage	7.23m
Width in travelling position with cage	1.58m
Width in travelling position without cage	1.58m
Height in travelling position	1.98m
Net weight	4,300kg
Setup width standard	5.15m
Setup length standard	5.45m
Setup width - one side narrow	3.95m
Setup width - both sides narrow	2.75m
Power supply	Kubota Diesel
	230v electric
	13A 3 pin plug
Climbing ability	21°
Setup ability	16.7°
Maximum point load (kN)	32.00
Load on 400mm pad (kN/cm <sup>2</sup> )	200.00
Load on 600mm pad (kN/cm <sup>2</sup> )	88.89
Load on 800mm pad (kN/cm <sup>2</sup> )	50.00
Adjustable track height/width height adjustment	Hydraulic - 0.19m
Drive control	Radio remote
Drive speed	4.0 km/h

## DISCLAIMER

The information on this page is for guidance only and is subject to change without prior notice in line with the Manufacturer's Development Program. Higher Access and its suppliers cannot be held liable for any damage or injury sustained through use of this information to specify equipment.